



(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
20.02.2002 Bulletin 2002/08

(51) Int Cl.7: **B29C 47/90, B29C 44/34**  
// **B29K311:14, B29K27:06**

(21) Application number: **97303324.4**

(22) Date of filing: **15.05.1997**

(54) **Polymer and wood flour composite extrusion**

Extrusion von Verbundmaterial aus Polymer und Holzmehl

Extrusion d'une composition de polymère avec farine de bois

(84) Designated Contracting States:  
**AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC**  
**NL PT SE**  
Designated Extension States:  
**AL LT LV RO SI**

(30) Priority: **16.05.1996 US 17756**  
**12.11.1996 US 748201**

(43) Date of publication of application:  
**19.11.1997 Bulletin 1997/47**

(73) Proprietor: **Marley Mouldings LLC**  
**Marlon, VA 24354-0610 (US)**

(72) Inventor: **Cope, Carroll**  
**Rural Retreat, VA 24368 (US)**

(74) Representative: **Matthews, Derek Peter**  
**Frank B. Dehn & Co., European Patent Attorneys,**  
**179 Queen Victoria Street**  
**London EC4V 4EL (GB)**

(56) References cited:  
**EP-A- 0 586 211 DE-A- 4 307 323**  
**GB-A- 2 036 148 US-A- 5 474 722**

- **PATENT ABSTRACTS OF JAPAN vol. 014, no. 181 (M-0961), 11 April 1990 & JP 02 032805 A (KAZUHIKO OKADA), 2 February 1990,**
- **PATENT ABSTRACTS OF JAPAN vol. 012, no. 398 (C-538), 21 October 1988 & JP 63 139946 A (KASAI KOGYO CO LTD), 11 June 1988,**
- **PATENT ABSTRACTS OF JAPAN vol. 010, no. 004 (C-322), 9 January 1986 & JP 60 163939 A (SHINETSU KAGAKU KOGYO KK), 26 August 1985,**
- **PATENT ABSTRACTS OF JAPAN vol. 008, no. 011 (C-205), 18 January 1984 & JP 58 179242 A (KASAI KOGYO KK), 20 October 1983,**
- **PATENT ABSTRACTS OF JAPAN vol. 009, no. 226 (M-412), 12 September 1985 & JP 60 082319 A (TOPPAN INSATSU KK), 10 May 1985,**

**EP 0 807 510 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

**BACKGROUND OF THE INVENTION**

- 5 [0001] The present invention relates to polymer extrusion and injection molded products and processes. The invention has particular application to a polymer extrusion or injected molded polymer that includes an addition of wood flour as an ingredient to the composite material.
- [0002] As a result of the increasing cost of wood and the attendant cost of wood frames, there is a demand for alternatives to solid wood construction products. Accordingly, the use of plastic extrusion profiles as substitutes for wood products in the area of picture frames and door, wall and window frames and moldings has increased in recent years. Injection molded plastic has also been utilized in the furniture industry for forming plastic chairs, lounges, tables and the like.
- 10 [0003] Polymer extrusions are well-known for use in forming components for window and door frames. Plastic extrusion profiles are commonly formed with polymer materials such as polyvinyl chloride and crystalline polyvinyl chloride (PVC and CPVC), polystyrene, acrylonitrile-butadiene-styrene (ABS) or similar materials. Polymer materials are conventionally used in combination with a variety of fillers, lubricants and pigments. Additionally, for foamed polymers, a blowing agent is also added to the composite. An example of a foamed extrusion is found in commonly assigned U.S. Patent No. 5,508,103, entitled "Extrusion Product with Decorative Enhancement And Process Of Making The Same."
- 15 [0004] As a result of the increasing cost of polymer materials, there exists a need for less expensive filler materials, which can be used with polymers such as PVC, but do not adversely affect the strength or wear resistance of the resulting profile. One such filler material that has been given increasing consideration is wood flour or wood fiber. Polyvinyl chloride thermoplastic polymer materials have been combined with wood and wood fiber to make extruded or injection molded materials.
- [0005] Various patents and publications have proposed extrusion and injection molded materials that combine polymers and wood fibers. One example of such a patent is U.S. Patent No. 5,406,768, assigned to Andersen Windows. The '768 patent describes a structural component made of polymer and wood fiber in which the polymer is rigid PVC. While rigid PVC has many uses, the present invention is directed primarily to the use of a composite with foam PVC. The extrusion of foamed PVC, includes a blowing or foaming agent. Addition of foaming agents can also affect the ability to add wood flour fillers. However, the use of foamed PVC has advantages over rigid PVC in that the less-dense foamed material allows substantial cost savings in the amount of PVC used in the composite. U.S. Patent Nos. 20 5,082,605 and 5,088,910 also describe composite materials formed from polymers and wood or cellulose fibers.
- [0006] US 5,474,722 discloses fiber or flake reinforced thermoplastic composite materials which may be made by extrusion processes. The flakes or fibers are embedded in a polymeric matrix.
- [0007] One difficulty presented by additions of wood flour is the absorption of moisture by the wood flour. The loss of moisture within the extrudate can slow the extrusion rate as a result of an increase in viscosity. Another difficulty involves foaming or expansion of the extrudate with the wood flour. The wood flour particles do not expand or foam and, thus, the foaming must be done around the wood flour particles. Also, unlike polymers such as PVC, the addition of heat to wood flour does not improve flowability of the extrudate.
- 25 [0008] The present invention overcomes these difficulties by a two step process as defined in claim 19 in which the wood flour particles are encapsulated by the resin and pelletized. The pelletized pieces are then mixed with additional resin and blowing agents. It is believed that the encapsulation process prevents moisture absorption and permits foaming of the extrudate. Additionally, the encapsulation provides a smoother skin in the final product.
- [0009] Thus viewed from one aspect the present invention provides an extrudable composite as defined in claim 1 for use in the production of extruded foamed plastic profiles as defined in claims 17 and 21, comprising, in parts (volume): polymer resin: up to 100; wood flour: 15-140; blowing agents: 0.2 to 5, said wood flour being encapsulated by said polymer resin and being in admixture with the remainder of said polymeric resin and said blowing agents.
- 30 [0010] The profile has use in moldings, window and door frames and similar types of applications. The composite material includes an addition of wood flour mixed with the polymer. The mixture is extruded into a formed profile through an extruder and vacuum tank or shaper.
- 50 [0011] Prior to extrusion, the wood flour is encapsulated by polymer and then pelletized. After mixing additional polymer with the pelletized product, and the addition of blowing agents, the product is extruded into a final profile. The vacuum tank and shaper help maintain the profile shape as the cellular extrudate expands.
- [0012] The composite of the present invention can include various types of polymers. Several examples are presented of preferred embodiments in which the polymer comprises PVC, CPVC and polystyrene. The PVC, CPVC and polystyrene are preferably added to the blend in the form of standard, commercially available resins, which include plasticizers to permit flexibility in the final product. The composite may also include process aids, stabilizers, lubricants and colorants. Preferably the volume ratio of wood flour to resin is in the range 15:100 to 140:100, more preferably 15:100 to 65:100. Preferably the volume ratio of blowing agent and polymer is in the range 0.2:100 to 5:100.
- 55

[0013] Viewed from a further aspect the present invention provides a method of forming an extrudable composite comprising the step of preparing a mixture of wood flour or wood fibres with foamable polymer resin in a high intensity mixer. The mixture is formed into pellets in a further step, after which the pellets are mixed with resin and a blowing agent prior to extrusion.

5 [0014] The process of the present invention utilizes an extruder in conjunction with a vacuum tank or shaper. The extrusion material is extruded through a die and into the shaper or vacuum tank. The material expands or foams as it enters the shaper and is cooled. The extrusion profile leaves the vacuum tank or shaper in a hardened form, which then fully hardens and cools.

10 [0015] For a more complete understanding of the present invention, one should refer to the embodiments illustrated in greater detail in the accompanying drawings and described below by way of examples of the invention. In the drawings, which are not to scale:

Figure 1 is a schematic diagram showing the sequence of operations in the final extrusion process of the present invention with polyvinyl chloride and wood flour extrusion material;

15 Figure 2 is a schematic diagram showing the sequence of operations in the final extrusion process of the present invention with polystyrene and wood flour extrusion material;

Figure 3 is a longitudinal sectional view of the end of an extrusion machine with a die and shaper;

Figure 4 is a cross-sectional view of the profile that emerges from the shaper of Figure 3 illustrating, schematically, the wood flour particles;

20 Figure 5 is a perspective view of a picture frame profile extruded with the composite of the present invention.

[0016] The present invention provides a composite of a polymer and wood flour for formation of an extrusion profile. The profile has use in moldings, window and door frames and similar types of applications.

25 [0017] The composite material of the present invention can include various types of polymers in combination with the wood flour filler addition. Several examples are presented of preferred embodiments in which the polymer comprises PVC, CPVC and polystyrene. The PVC, CPVC and polystyrene are preferably added to the blend in the form of standard, commercially available resins, which include plasticizers to permit flexibility in the final product. The composite also includes an amount of wood flour as well as process aids, stabilizers, lubricants, colorants and a blowing agent. The profile material is typically used in a picture frame or door, window, wall or other molding, and thus preferably includes component materials that provide high strength and durability.

30 [0018] The wood flour addition is preferably hardwood in the form of sawdust. The wood flour is ground to a preferred particle size in which 0% to 10% is 425 microns; 35% to 80% is 250 microns; and 15% to 50% is 180 microns. Moisture is preferably controlled in the wood flour to approximately between 3% and 6%.

35 [0019] The materials are formed into an extrudable mixture by combining various ingredients with a high intensity mixer at the appropriate temperature. Resins, fillers and modifiers may be added to the mixture. The extrusion mixture is then formed into a profile by pulling the mixture through an extrusion die and shaper.

40 [0020] Before the addition of wood flour, the polymer resin is blended with additional ingredients in a standard Henschel blender or mixer. In a polystyrene composite of the present invention, crystal polystyrene (CPS) and high impact polystyrene (HIPS) are added to the blender at low speed. Mineral oil, which acts as a wetting agent, is added and blended for approximately 30 seconds followed by the addition of stearic acid, which acts as a lubricant, which is added and blended for approximately another 30 seconds. Titanium dioxide, which acts as a colorant, is optionally added at this time. Full mixing of this mixture with CPS requires approximately 4 minutes total.

45 [0021] Alternatively, PVC and CPVC may be used in which case they are added to the Henschel blender at a temperature of approximately 37.8°C (100°F) and mixed at high speed. The other ingredients are added to the PVC and CPVC blend as explained above for CPS. The PVC and CPVC are mixed to a temperature of approximately 93.3°C (200°F) and then cooled to approximately 65.6°C (150°F).

50 [0022] In the above-described preparation of the resin mixture, the resin is added to the wood flour in a continuous mixing machine and then extruded and pelletized in a pelletizer machine. In this first extrusion to form pellets, blowing agent is not used. Thus, the initial pelletizing extrusion does not include foaming of the polymer blend. The ingredients are preferably added to the mixer hopper by conveyors so that the conveyor rates may be adjusted to add the appropriate amount of each ingredient to the mixture. Thus, the polymer resin compound is added to the continuous mixing machine by one conveyor while the wood flour is added to the continuous mixing machine by another conveyor. Additional conveyors may be used for the additional ingredients, such as lubricants and colorants.

55 [0023] The materials are mixed together in the mixer section of the continuous mixing machine. The fused material has a melt temperature of approximately 177°C (350°F) to 232°C (450°F). It is understood that sufficient mixing is important to cause encapsulation of the wood flour particles by the polymer resin. The fused material is heated in the continuous mixer machine to the melt temperature where it forms a continuous rope and is then dropped onto the screw extruder section of the continuous mixer machine. Control of the melt temperature of the continuous rope is

- important to prevent degradation of the extrudant. The melt material then exits the extruder section of the mixer machine through a strand die with approximately 210 openings. The melt proceeds through the strand die and the strands are pelletized by a dry face pelletizer. Again, temperature control through the extruder and strand die is important to prevent degradation of the extrudant. Pellets of material are preferably formed in a size approximately 0,375 mm (0.015 inch) in length and a diameter of approximately 0,375 mm (0.015 inch). Of course pellet size may be increased or decrease by adjustment of the speed of the pelletizing cutter.
- [0024] The pellets are preferably moved from the cutting area to a cooling chamber by compressed air. The pellets then move through the cooling chamber by chilled compressed air and are discharged into storage vessels. Control of the moisture content of the pellets is also important to assure the quality of the composite. At the end of the pelletizing process, the pellet moisture content should be less than 1% moisture.
- [0025] As presently understood, the polymer resin (PVC, CPVC or PS) coats the surface of the wood fiber particles. While some resin may penetrate the surface of the fiber, on account of the jagged surface of the fiber particles, the present process is understood to encapsulate or provide a coating about the wood fiber particles with the polymer resin and prevent or minimize the penetration of moisture into the fiber particle.
- [0026] Only a portion of the total desired amount of resin is used in making the pellets. The remainder of the resin is added when making the final extrusion composite. For example, in a composite having 100 parts total of PVC resin, only 40 parts resin will be added to the mixture to form the pellets. The remaining 60 parts resin will be added in forming the final product. Of course, the PVC is only a portion of the commercially available PVC resin. Similarly, polystyrene is a portion of commercially available polystyrene resin, which is used in the composite of the present invention.
- [0027] After preparation of the polymer and wood fiber pellets, the pellets are blended into a compound with additional polymer resins for use in making the final extrusion profiles. The polymer/wood fiber pellet is added to a mixer with additional polymer resin. In the case of PS and wood flour, CPS and HIPS are added to a Henschel mixer at low speed along with the addition of the PS/wood flour pellets. At 30 second intervals, additions are made of mineral oil, then blowing agents and nucleating agents and finally the remaining ingredients. The mixture is blended for about 4 minutes at low speed and then dumped into a bin.
- [0028] In the case of PVC or CPVC and wood flour, the pellets are added to a Henschel mixer at high speed along with PVC or PVC and CPVC resin at a temperature of approximately 100°F. Additional ingredients are added as the temperature is increased. Stabilizer is added at 65.6°C (150°F), followed by filler, process modifiers and process aids at 71.1°C (160°F) and, finally, lubricants and blowing agents at 82.2°C (180°F). When the mixture reaches approximately 93.3°C (200°F), the mixture is dumped into a cooler and allowed to cool to approximately 65.6°C (150°F).
- [0029] Schematic diagrams that illustrate two preferred sequences of preparation of the final extrusion profile of the present invention are shown in Figures 1 and 2. In Figure 1, an extruder 10 is used in conjunction with a vacuum tank 12. A puller 20 acts to pull the extruded profile onto a cut-off table 22. The process sequence shown in Figure 1 is used with the polyvinyl chloride and wood flour extrusion material.
- [0030] A second sequence of preparation is shown in Figure 2. In this sequence, the extruder 24 is followed by a shaper 26, puller 34 and cut-off table 36. This process sequence is used with polystyrene and wood flour extrusion material. In each sequence, the extruded profile 58 is pulled through the die and formed.
- [0031] As shown in more detail in Figure 3, extrusion of the above-described mixtures is accomplished by use of an extruder 40 with a body 42, worm 44 and die 46. The worm acts to force the extrusion material through the die and shaper 48. The shaper includes a cylindrical sleeve 50 with a smooth guide wall. The shaper has substantially the same cross-sectional shape as the die. The shaper preferably includes a heat controlling jacket 52 with a connection 54 to enable a temperature regulating fluid, such as water, to be contained within the jacket.
- [0032] The puller, shown in Figure 1, acts to draw the extruded profile 58 from the shaper. The composition of extrudable material is prepared and introduced into the extrusion machine through channel 60. The material is pushed through the die, where it only slightly expands, and then begins to fully expand as it enters the shaper 48. The jacket 52 of the shaper 48 is kept at a temperature lower than the softening point of the extrusion material. As the material contacts the inside wall of the shaper, it begins to harden from the outside surface to the inner core.
- [0033] The material begins to expand or foam as it passes through the die and then it begins to fully expand as it enters the shaper. A vacuum draw on the shaper helps maintain the profile shape as the cellular material expands. The material cools as it passes through the shaper and forms its desired shape. A puller acts to draw the extruded profile from the shaper. The profile achieves a cross-section that is substantially the same as the cross-section of the outlet of the shaper. The temperatures of the die and shaper as well as the speed of the extrusion profile are parameters that affect the properties of the resulting product. A space of several inches may be present between the die exit and the shaper entrance in order to allow some expansion of the extrudate before entering the shaper.
- [0034] Specifically, for the above-described PS extrusion material, the extruder temperatures are preferably as follows: zone no. 1: 138-154°C (280-310°F); zones nos. 2, 3, 4: 143-177°C (290-350°F); zone no. 5: 160-182°C (320-360°F) and the die: 149-177°C (300-350°F). In contrast, for the above-described PVC and CPVC the extruder temperatures are preferably as follows: zone no. 1: 143-165°C (290-330°F); zones nos. 2, 3, 4: 149-182°C (300-360°F);

zone no. 5: 160-191°C (320-375°F) and the die: 160-191°C (320-375°F). The temperatures of zone no. 1 must be sufficiently high to provide strong forward movement of the extrusion material, but not too high so as to cause slippage of the material on the extruder screw. The temperatures of zones nos. 2, 3 and 4 must be regulated to continue proper forward movement of the melt as it becomes a homogeneous mixture to insure a suitable density of the foamed profile. Finally, the temperature of the die is important for the foam to expand to the proper size of the shaper.

[0035] The cross-section of the extrusion profile of one embodiment of the present invention is shown in Figure 4. A hard skin 66, 68 may be formed on the outer portion of the profile 70. The remaining portions 72, 74 of the profile may include a hardened skin or may be left without a hard skin, as desired. Figure 4 also illustrates the encapsulated wood fibers 73 within the cellular matrix 75 of the profile.

[0036] One example of a completed profile for a picture frame is shown in Figure 5. The profile includes a decorative portion 76 as well as hardened skin portions 78, 80. After the profile is cured and hardened, various finishes may be applied to the profile to enhance and highlight the profile. For example, the profile may be painted, stained, glazed, brushed or clear coated. Hot foil stampings may also be applied for further decorative effect.

[0037] Using the above-described process, pellets were prepared and extruded into profiles. A PVC/wood flour pellet was prepared using a portion of the total amount of 100 parts PVC resin with the following formulation:

<u>Ingredient</u>	<u>Parts</u>	<u>Description</u>
PVC Resin	up to 100	Resin
Mark 1924	2	Tin Stabilizer
Kaneka K12	7	Acrylic Process Aid
Calcium Carbonate	4	Filler
Wood Flour	15 to 60	Wood Fiber Filler
Calcium Sterate	1	Lubricant
Loxio1 1875	1.5	Ester Lubricant
AC-629A	0.1	Oxidized Polyethylene Wax Lubricant

[0038] The PVC/wood flour pellets were blended to form an extrudable compound with the remaining PVC resin and blowing agent with the following formulation:

<u>Ingredient</u>	<u>Parts</u>	<u>Description</u>
PVC Resin	100	Resin
Mark 1924	2	Tin Stabilizer
Kaneka K12	7	Acrylic Process Aid
Calcium Carbonate	4	Filler
PVC/Wood Flour Pellet	15 to 60	Wood Flour Filler
Calcium Sterate	1	Lubricant
Loxio1 1875	1.5	Ester Lubricant
AC-629A	0.1	Oxidized Polyethylene Wax Lubricant
Hughes HRVP 01	.2 to .7	Blowing Agent
Titanium Dioxide	0 to 10	Whitener

[0039] Pellets of a CPVC/wood flour blend were prepared with the following formulation:

<u>Ingredient</u>	<u>Parts</u>	<u>Description</u>
PVC Resin	up to 40	Resin
C-PVC Resin	up to 60	Resin For HDT performance
Mark 1924	3.5	Tin Stabilizer

(continued)

<u>Ingredient</u>	<u>Parts</u>	<u>Description</u>
Kaneka K12	7.45	Acrylic Process Aid
Titanium Dioxide	10	Colorant
Wood Flour	15 to 65	Wood Flour Filler
Calcium Sterate	1.05	Lubricant
VGE-1875	1.68	Ester Wax Lubricant
AC-629A	0.82	Oxidized Polyethylene Wax Lubricant

[0040] The CPVC/wood flour pellets were blended to form an extrudable composite with the following formulation:

<u>Ingredient</u>	<u>Parts</u>	<u>Description</u>
PVC Resin	40	Resin
C-PVC Resin	60	Resin For HDT performance
Mark 1924	3.5	Tin Stabilizer
Kaneka K12	7.45	Acrylic Process Aid
Titanium Dioxide	10	Colorant
CPVC/Wood Flour Pellet	15 to 65	Wood Flour Filler
Calcium Sterate	1.05	Lubricant
VGE-1875	1.68	Ester Wax Lubricant
AC-629A	0.82	Oxidized Polyethylene Wax Lubricant
Hughes HRVP 01	.2 to .7	Blowing Agent
Titanium Dioxide	0 to 10	Whitener

[0041] Pellets of a polystyrene/wood flour blend were prepared with the following formulation:

<u>Ingredient</u>	<u>Parts</u>	<u>Description</u>
Crystal Polystyrene	up to 70	Resin
High Impact Polystyrene	up to 30	Resin For Impact Strength
Mineral Oil	.22	Wetting Agent
Stearic Acid	.03	Lubricant
Wood Flour	60 to 140	Wood Flour Filler

[0042] The polystyrene/wood flour pellets were blended to form an extrudable composite with the following formulation:

<u>Ingredient</u>	<u>Parts</u>	<u>Description</u>
Crystal Polystyrene	70	Resin
High Impact Polystyrene	30	Resin For Impact Strength
Mineral Oil	.22	Wetting Agent
Stearic Acid	.03	Lubricant
PS/Wood Flour Pellet	60 to 140	Wood Flour Filler
Sodium Bicarbonate	.5 to .8	Blowing Agent

(continued)

Ingredient	Parts	Description
Citric Acid	.1 to .2	Activator
Titanium Dioxide	0 to 10	Whitener

[0043] The above ingredients in each example were blended and utilized to form an extrusion profile, as described above.

### Claims

1. An extrudable composite for use in the production of extruded foamed plastic profiles (58) comprising, in parts by volume:

polymer resin	up to 100
wood flour	15-140
blowing agents	0.2 to 5.

said wood flour being encapsulated by said polymer resin and being in admixture with the remainder of said polymeric resin and said blowing agents.

2. A composite as claimed in claim 1 wherein said wood flour has the following particle sizes in parts by volume:

up to 10%	425 microns,
35%-80%	250 microns,
15%-50%	180 microns.

3. A composite as claimed in claim 2 wherein at least 40% of said wood flour has a particle size of about 250 microns.
4. A composite as claimed in any preceding claim which further comprises, in parts by volume:

stabilizers	up to 5
lubricants	up to 5
process aids	up to 10
colorant	up to 10.

5. A composite as claimed in any preceding claim wherein said wood flour and said polymer resin are present in the volume ratio 15:100 to 140:100.
6. A composite as claimed in any preceding claim wherein said wood flour and said polymer resin are present in the volume ratio 15:100 to 65:100.
7. A composite as claimed in any preceding claim wherein said blowing agent and said polymer resin are present in the volume ratio 0.2:100 to 5:100.
8. A composite as claimed in any preceding claim wherein said wood flour is in the form of pellets comprising wood flour encapsulated by a proportion of said polymer resin.
9. A composite as claimed in any preceding claim wherein said polymer resin is polyvinylchloride, crystalline polyvinylchloride or polystyrene.
10. A composite as claimed in any preceding claim comprising, in parts by volume:

polyvinyl chloride resin	100
wood flour	15-60
blowing agents	0.2 to 5.

5

11. A composite as claimed in any of claims 1 to 9 comprising, in parts by volume:

polystyrene resin	100
wood flour	60-140
blowing agents	0.5 to 5.

10

12. A composite as claimed in any of claims 1 to 9 comprising, in parts by volume:

crystalline polyvinyl chloride resin	60
polyvinyl chloride resin	40
wood flour	15-65
blowing agents	0.2 to 5.

15

13. An extrudable composite comprising a foamable polymer resin and wood flour wherein said wood flour is encapsulated by polymer resin and is in admixture with said foamable polymer resin.

20

14. A composite as claimed in claim 13 wherein said foamable polymer resin includes one or more blowing or foaming agents.

25

15. A composite as claimed in claim 14 wherein said wood flour is in the form of pellets in which the wood flour is encapsulated by polymer.

30

16. A composite as claimed in any of claims 13 to 15 which contains one or more additional foamable polymers.

35

17. A process for obtaining an extruded profile (58) comprising extruding an extrudable composite as claimed in any of claims 1 to 16.

40

18. A process as claimed in claim 17 wherein air pockets are present around the wood flour particles in the extruded profile (58) thereby obtained.

45

19. A method of forming a foamable extrudable composite as claimed in any one of claims 1 to 16, comprising the steps of:

50

mixing wood flour and polymer resin in a high intensity mixer;  
extruding and cutting said mixture into pellets; and  
mixing said pellets with polymer resin and blowing agent to form a foamable extrudable composite.

55

20. A method as claimed in claim 19 wherein said first mixing step is carried out at a melt temperature of approximately 138°C to 232°C (350°F to 450°F).

60

21. A method of forming a solid elongated member of predetermined profile comprising the steps of:

65

compressing an extrudable composite as claimed in any of claims 1 to 16 at a compression stage by passage through an orifice, said orifice having at one end thereof a predetermined profile;  
expanding said foam material through a shaper (26, 48), said shaper having an internal solid surface defining a channel for said foam material; and  
solidifying said foam material to form a solid elongated member.

70

22. A method as claimed in claim 21 wherein said extrudable composite is prepared by a process as claimed in claim 19 or claim 20.



23. A method as claimed in claim 21 or claim 22 wherein said elongated member is a frame for a picture.

# Patentansprüche

5

1. Extrudierbarer Verbundstoff zur Verwendung bei der Herstellung von extrudierten Kunststoffschäumprofilen (58), der, in Volumenteilen, folgendes aufweist:

10

Polymerharz	bis zu 100
Holzmehl	15 bis 140
Treibmittel	0,2 bis 5

15

wobei das Holzmehl mit dem Polymerharz verkapselt ist und in Mischung mit dem übrigen Polymerharz und den Treibmitteln vorliegt.

2. Verbundstoff nach Anspruch 1, wobei das Holzmehl die folgenden Partikelgrößen in Volumenteilen aufweist:

20

bis zu 10%	425 Mikron,
35% bis 80%	250 Mikron,
15% bis 50%	180 Mikron.

25

3. Verbundstoff nach Anspruch 2, wobei mindestens 40% des Holzmehls eine Partikelgröße von etwa 250 Mikron aufweist.

4. Verbundstoff nach einem der vorstehenden Ansprüche, der desweiteren, in Volumenteilen, folgendes aufweist:

30

Stabilisatoren	bis zu 5
Schmierstoffe	bis zu 5
Verarbeitungshilfsstoffe	bis zu 10
Farbstoffe	bis zu 10.

35

5. Verbundstoff nach einem der vorstehenden Ansprüche, wobei das Holzmehl und das Polymerharz in dem Volumenverhältnis 15:100 bis 140:100 vorliegen.

6. Verbundstoff nach einem der vorstehenden Ansprüche, wobei das Holzmehl und das Polymerharz in dem Volumenverhältnis 15:100 bis 65:100 vorliegen:

40

7. Verbundstoff nach einem der vorstehenden Ansprüche, wobei das Treibmittel und das Polymerharz in dem Volumenverhältnis 0,2:100 bis 5:100 vorliegen.

45

8. Verbundstoff nach einem der vorstehenden Ansprüche, wobei das Holzmehl in der Form von Pellets vorliegt, die Holzmehl aufweisen, das mit einem Anteil des Polymerharzes verkapselt ist.

9. Verbundstoff nach einem der vorstehenden Ansprüche, wobei das Polymerharz Polyvinylchlorid, kristallines Polyvinylchlorid oder Polystyrol ist.

50

10. Verbundstoff nach einem der vorstehenden Ansprüche, der, in Volumenanteilen, folgendes aufweist:

Polyvinylchloridharz	100
Holzmehl	15 bis 60
Treibmittel	0,2 bis 5.

55

11. Verbundstoff nach einem der Ansprüche 1 bis 9, der, in Volumenteilen, folgendes aufweist:

Polystyrolharz	100
----------------	-----

(fortgesetzt)

Holzmehl	60 bis 140
Treibmittel	0,5 bis 5.

5

12. Verbundstoff nach einem der Ansprüche 1 bis 9, der, in Volumenteilen, folgendes aufweist:

10

Kristallines Polyvinylchloridharz	60
Polyvinylchloridharz	40
Holzmehl	15 bis 65
Treibmittel	0,2 bis 5.

15

13. Extrudierbarer Verbundstoff, der ein verschäumbares Polymerharz und Holzmehl aufweist, wobei das Holzmehl durch Polymerharz verkapselt ist und in Mischung mit dem verschäumbaren Polymerharz vorliegt.

14. Verbundstoff nach Anspruch 13, wobei das verschäumbare Polymerharz ein oder mehrere Treibmittel oder Schaumbildner aufweist.

20

15. Verbundstoff nach Anspruch 14, wobei das Holzmehl in der Form von Pellets vorliegt, in denen das Holzmehl durch Polymer verkapselt ist.

16. Verbundstoff nach einem der Ansprüche 13 bis 15, der einen oder mehrere zusätzliche verschäumbare Polymere enthält.

25

17. Verfahren zur Gewinnung eines extrudierten Profils (58), das das Extrudieren eines extrudierbaren Verbundstoffs nach einem der Ansprüche 1 bis 16 umfaßt.

30

18. Verfahren nach Anspruch 17, wobei Luftaschen in dem dadurch erhaltenen extrudierten Profil (58) um die Holzmehlpartikel herum vorliegen.

19. Verfahren zur Bildung eines verschäumbaren extrudierbaren Verbundstoffs nach einem der Ansprüche 1 bis 16, das die folgenden Schritte aufweist:

35

Mischen von Holzmehl und Polymerharz in einem intensitätsstarkem Mischer, Extrudieren und Schneiden der Mischung in Pellets, und Mischen der Pellets mit Polymerharz und Treibmittel, um einen verschäumbaren extrudierbaren Verbundstoff zu bilden.

40

20. Verfahren nach Anspruch 19, wobei der erste Mischungsschritt bei einer Schmelztemperatur von etwa 138°C bis 232°C (350°F bis 450°F) ausgeführt wird.

21. Verfahren zur Bildung eines festen länglichen Elements mit einem vorbestimmten Profil, das die folgenden Schritte aufweist:

45

Verpressen bzw. Verdichten eines extrudierbaren Verbundstoffs nach einem der Ansprüche 1 bis 16 in einer Kompressionsstufe durch Durchtrag durch eine Öffnung, wobei die Öffnung an einem Ende davon ein vorbestimmtes Profil aufweist,

50

Verschäumen des Schaummaterials durch eine Form bzw. Schablone (26, 48), wobei die Form bzw. Schablone eine feste Innenfläche aufweist, die einen Kanal für das Schaummaterial definiert, und Verfestigen des Schaummaterials, um ein festes längliches Element zu bilden.

22. Verfahren nach Anspruch 21, wobei der extrudierbare Verbundstoff durch ein Verfahren nach Anspruch 19 oder Anspruch 20 hergestellt wird.

55

23. Verfahren nach Anspruch 21 oder Anspruch 22, wobei das längliche Element ein Rahmen für ein Bild ist.

## Revendications

1. Matériau composite extrudable pour une utilisation dans la fabrication de profilés extrudés (58) en matière plastique alvéolaire comprenant, en parties par volume

5

une résine polymère : jusqu'à 100 une farine de bois : 15 à 140  
des agents gonflants : 0,2 à 5,

10

ladite farine de bois étant encapsulée par ladite résine polymère et étant ajoutée et mélangée au reste de ladite résine polymère et auxdits agents gonflants.

2. Matériau composite selon la revendication 1, **caractérisé en ce que** les tailles de particule de ladite farine de bois en parties par volume sont comme suit :

15

jusqu'à 10%	425 microns
35% à 80	250 microns
15% à 50%	180 microns

20

3. Matériau composite selon la revendication 2, **caractérisé en ce qu'**au moins 40% de ladite farine de bois a une taille de particule d'environ 250 microns.

4. Matériau composite selon l'une quelconque des revendications précédentes qui comprend en outre, en parties par volume :

25

des agents stabilisants : jusqu'à 5  
des agents lubrifiants : jusqu'à 5  
des auxiliaires de procédé : jusqu'à 10  
un colorant : jusqu'à 10.

30

5. Matériau composite selon l'une quelconque des revendications précédentes, **caractérisé en ce que** ladite farine de bois et ladite résine polymère sont présentes dans un rapport en volume compris entre 15 : 100 et 140 : 100.

35

6. Matériau composite selon l'une quelconque des revendications précédentes, **caractérisé en ce que** ladite farine de bois et ladite résine polymère sont présentes dans un rapport en volume compris entre 15 : 100 et 65 : 100.

7. Matériau composite selon l'une quelconque des revendications précédentes, **caractérisé en ce que** ledit agent gonflant et ladite résine polymère sont présents dans un rapport en volume compris entre 0,2 : 100 et 5 : 100.

40

8. Matériau composite selon l'une quelconque des revendications précédentes, **caractérisé en ce que** ladite farine de bois se présente sous la forme de granulés constitués de farine de bois encapsulée par une portion de ladite résine de polymère.

45

9. Matériau composite selon l'une quelconque des revendications précédentes, **caractérisé en ce que** ladite résine polymère est le chlorure de polyvinyle, le chlorure de polyvinyle cristallin ou le polystyrène.

10. Matériau composite selon l'une quelconque des revendications précédentes comprenant, en parties par volume :

50

de la résine de chlorure de polyvinyle : 100  
de la farine de bois : 15 à 60  
des agents gonflants : 0,2 à 5.

55

11. Matériau composite selon l'une quelconque des revendications 1 à 9 comprenant, en parties par volume :

de la résine de polystyrène : 100  
de la farine de bois : 60 à 140  
des agents gonflants : 0,5 à 5.

12. Matériau composite selon l'une quelconque des revendications 1 à 9 comprenant, en parties par volume :

- 5 de la résine de chlorure de polyvinyle cristallin : 60
- de la résine de chlorure de polyvinyle : 40
- de la farine de bois : 15 à 65
- des agents gonflants : 0,2 à 5.

10 13. Matériau composite extrudable comprenant une résine polymère moussante et de la farine de bois, **caractérisé en ce que** ladite farine de bois est encapsulée par la résine polymère et est ajoutée et mélangée à ladite résine polymère moussante.

14. Matériau composite selon la revendication 13, **caractérisé en ce que** ladite résine polymère moussante inclut un ou plusieurs agents gonflants ou moussants.

15 15. Matériau composite selon la revendication 14, **caractérisé en ce que** ladite farine de bois se présente sous la forme de granulés dans lesquels la farine de bois est encapsulée par le polymère.

16. Matériau composite selon l'une quelconque des revendications 13 à 15 qui contient un ou plusieurs polymères moussants additionnels.

20 17. Procédé d'obtention d'un profilé extrudé (58) comprenant l'extrusion d'un matériau composite extrudable selon l'une quelconque des revendications 1 à 16.

25 18. Procédé selon la revendication 17, **caractérisé en ce que** des poches d'air sont présentes autour des particules de farine de bois dans le profilé extrudé (58) obtenu par ce moyen.

19. Procédé de réalisation d'un matériau composite extrudable moussant selon l'une quelconque des revendications 1 à 16, comprenant les étapes consistant à :

- 30 mélanger de la farine de bois et de la résine polymère dans un mélangeur de grande puissance ;
- extruder et couper ledit mélange en granulés ; et
- mélanger lesdits granulés à de la résine polymère et à un agent gonflant pour obtenir un matériau composite extrudable moussant.

35 20. Procédé selon la revendication 19, **caractérisé en ce que** ladite première étape de mélange est réalisée à une température de fusion comprise entre 138°C et 232°C (350°F et 450°F) approximativement.

21. Procédé de formage d'un élément solide, allongé, de profil prédéterminé comprenant les étapes consistant à :

- 40 compresser un matériau composite extrudable selon l'une quelconque des revendications 1 à 16 selon une étape de compression par le passage par un orifice, une des extrémités dudit orifice ayant un profil prédéterminé ;
- expanser ledit matériau alvéolaire à travers un dispositif de formage (26, 48), ledit dispositif de formage ayant une surface interne solide délimitant un canal pour ledit matériau alvéolaire ; et
- 45 solidifier ledit matériau alvéolaire pour former un élément plein allongé.

22. Procédé selon la revendication 21, **caractérisé en ce que** ledit matériau composite extrudable est préparé par un procédé selon la revendication 19 ou selon la revendication 20.

50 23. Procédé selon la revendication 21 ou la revendication 22, **caractérisé en ce que** ledit élément allongé est un cadre destiné à un tableau.

FIG.1

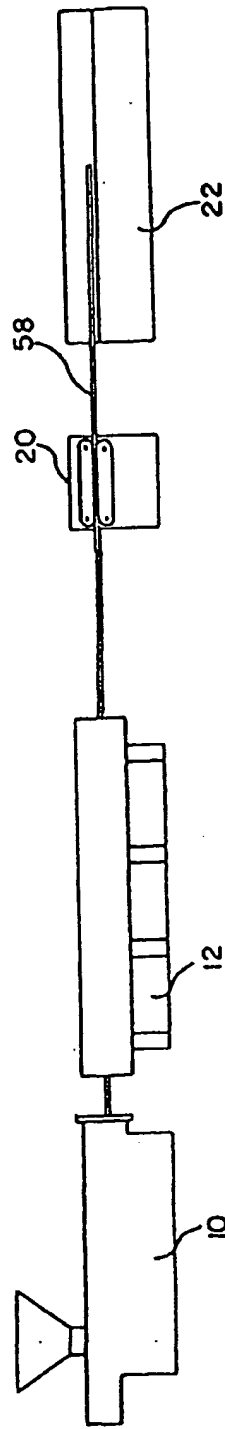


FIG.2

